
AMCC-168S

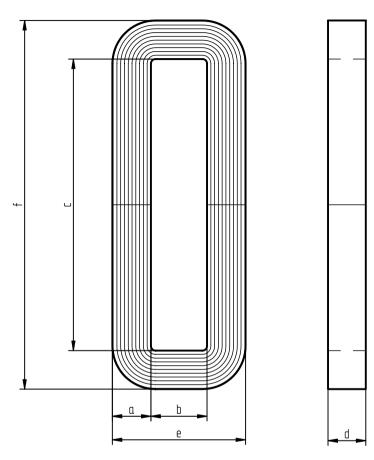

NOTEC.

- 1.) CUSTOMER TO MARK THE DIMENSIONS/CHARACTERISTICS THAT ARE CRITICAL TO FIT/FORM AND FUNCTION ON THE DRAWING
- 2.) NUMBER OF COMPONENTS TO BE SUBMITTED FOR PILOT PRODUCTION LOT=_____PIECES.
- 3.) UNLESS OTHERWISE SPECIFIED, STANDARD PACKAGING USED BY HITACHI METGLAS WILL BE PROVIDED.
- 4.) ALL PRODUCTION RECORDS AND DATA PERTAINING TO THIS PRODUCT WILL BE RETAINED FOR A PERIOD OF 1 YEAR FROM THE DATE OF SHIPMENT.

PHYSICAL SPECIFICATIONS

| Core Build | (a) mm | 20.40 ± 0.50 |
|--------------------|----------------------|-------------------|
| Window Width | (b) mm | 29.70+1.00/-0.00 |
| Window Length | (c) mm | 154.20+2.00/-0.00 |
| Core Height | (d) mm | 20.00+0.50/-0.00 |
| Core Width | (e) mm | 70.50+1.25/-0.25 |
| Core Length | (f) mm | 195.0+3.00/-0.00 |
| Mean Magnetic Path | (lm) cm | 45.40 |
| Net Area | (Ac) cm ² | 3.35 |
| Window Area | (Wa) cm ² | 45.70 |
| Area Product | (Ap) cm ⁴ | 153.00 |
| Weight of Core | g | 1090 (Nom.) |
| | | |

ELECTRICAL SPECIFICATIONS

Core Loss @ 16kHz, 0.037 T ≤ 1.38W\Kg.

Im = mean magnetic path length

Ac = net cross-sectional area

Wa = core window area

NOTE :-

- 1. ALL MEASUREMENTS ARE DONE AT ROOM TEMPERATURE.
- 2. WEIGHT INCLUDES 2% EPOXY WEIGHT.
- 3. CONTINUOUS OPERATING TEMPERATURE: 155°C

CORE MATERIAL: MEGLAS®ALLOY 2605SA1

| NOTE :- |
|---|
| THIS DRAWING, THE PROPERTY OF HITACHI |
| METGLAS INDIA PVT. LTD. IS FURNISHED |
| SUBJECT TO RETURN ON DEMAND AND THE |
| CONDITION THAT THE INFORMATION AND |
| TECHNOLOGY EMBODIED HEREIN SHALL NOT |
| BE DISCLOSED OR USED AND THE DRAWING |
| SHALL NOT BE REPRODUCED OR COPIED IN |
| WHOLE OR IN PART EXCEPT AS PREVIOUSLY |
| AUTHORIZED IN WRITING. ANY PERSON WHO |
| MAY RECEIVE OR OBSERVE THIS DESIGN |
| WILL BE HELD STRICTLY LIABLE FOR ANY |
| VIOLATION WHETHER WILLFUL OR NEGLIGENT. |

| OLERANCES UNLESS OTHERWISE SPECIFIED | NO. | REVISION | BY | APPR. | DATE |
|--------------------------------------|-----|---|----|-------|----------|
| | | CORE LOSS WAS WRITTEN MEASURED @ 0.37T BY MISTAKE,INSTEAD OF 0.037T | | SR | 04/19/02 |
| | | b.c.d.e & f TOLERANCE WERE ±0.50,±1.0, +0.5/-0.1,±0.75,±2.0/-1.0 & lm.ac.Wa.pa.g DIM. b & c WERE 43.49, 3.59,46.87,168.26, 1145,30.2 & 155.2. COMPANY NAME WAS HONEYWELL. | SA | RK | 02/14/04 |
| | 3.) | ADDED NOTE#3. (AS PER PCN002). | SA | RK | 07/26/04 |
| | 4.) | PRODUCT & DRAWING FORMAT REVISED. (AS PER PCN004) | RG | RK | 25/09/06 |
| | | | | | |

| DIMENSIONS | ММ | DESCRIF | | C-CORE D | ESIGN | | , | | | | REV. |
|------------|----------------------|---|---------------------|---|--|--|--|---|--|--|--|
| SCALE | N.T.S | MATERIA | ΛL. | | 20.01 | | | | | | |
| PROJECTION | THIRD ANGLE | | | AS NOTED | | | 1 01 | F 1 | AMCC- | -168S | 4 |
| | | | SR | 07/12/01 | SR | 07/12 | 2/01 | RH | ,RM,ST | 07/1 | 9/0 |
| METGLAS | | .S | DRAWN | DATE | CHECKED | DAT | le. | API | PROVED | D DATE | |
| | SCALE PROJECTION HIT | SCALE N.T.S PROJECTION THIRD ANGLE HITACH | SCALE N.T.S MATERIA | SCALE N.T.S PROJECTION THIRD ANGLE HITACHI METGLAS | SCALE N.T.S PROJECTION THIRD ANGLE HITACHI METGLAS C-CORE D AS NOTED | SCALE N.T.S PROJECTION THIRD ANGLE HITACHI METCLAS C-CORE DESIGN AS NOTED | SCALE N.T.S PROJECTION THIRD ANGLE HITACHI METGLAS C-CORE DESIGN AS NOTED SR 07/12/01 SR 07/12 | SCALE N.T.S PROJECTION THIRD ANGLE HITACHI METCLAS C-CORE DESIGN N C-CORE DESIGN N C-CORE DESIGN N O7/12/01 SR 07/12/01 | SCALE N.T.S PROJECTION THIRD ANGLE HITACHI METCLAS C-CORE DESIGN NO. SCALE O7/12/01 SR O7/12/01 RH | SCALE N.T.S PROJECTION THIRD ANGLE HITACHI METCLAS OT/12/01 SR 07/12/01 RH,RM,ST | SCALE N.T.S PROJECTION THIRD ANGLE HITACHI METCLAS SCALE 0-CORE DESIGN NO. NO. NO. NO. NO. NO. NO. NO. NO. NO |

EG/FM/11/2