
# AMCC-367S

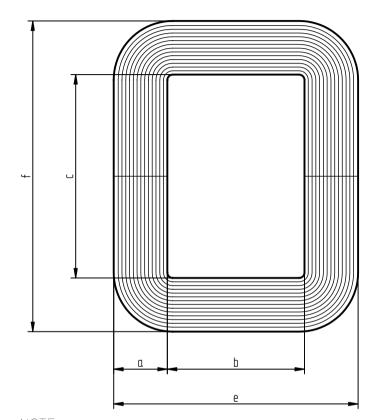

\_ \_ \_ \_

- NOTES:\_
- 1.) CUSTOMER TO MARK THE DIMENSIONS/CHARACTERISTICS THAT ARE CRITICAL TO FIT/FORM AND FUNCTION ON THE DRAWING
- 2.) NUMBER OF COMPONENTS TO BE SUBMITTED FOR PILOT PRODUCTION LOT=\_\_\_\_\_PIECES.
- 3.) UNLESS OTHERWISE SPECIFIED, STANDARD PACKAGING USED BY HITACHI METGLAS WILL BE PROVIDED
- 4.) ALL PRODUCTION RECORDS AND DATA PERTAINING TO THIS PRODUCT WILL BE RETAINED FOR A PERIOD OF 1 YEAR FROM THE DATE OF SHIPMENT.

## PHYSICAL SPECIFICATIONS

Core Build	(a) mm	$25.80 \pm 1.0$
Window Width	(b) mm	66.0+0.5/-0.0
Window Length	(c) mm	97.8+1.2/-0.0
Core Height	(d) mm	25.0+0.7/-0.0
Core Width	(e) mm	117.6±2.5
Core Length	(f) mm	149.4±2.5
Mean Magnetic Path	(Im) cm	43.78
Net Area	(Ac) cm <sup>2</sup>	5.29
Window Area	(Wa) cm <sup>2</sup>	63.81
Area Product	(Ap) cm <sup>4</sup>	338.00
Weight of Core	g	1662 (Nom.)

#### ELECTRICAL SPECIFICATIONS

Core Loss @ 16kHz, 0.037 T  $\leq$  1.38W\Kg.

Im = mean magnetic path length

Ac = net cross-sectional area

Wa = core window area

## NOTE :-

- 1. ALL MEASUREMENTS ARE DONE AT ROOM TEMPERATURE.
- 2. WEIGHT INCLUDES 2% EPOXY WEIGHT.
- 3. CONTINUOUS OPERATING TEMPERATURE: 155°C

## CORE MATERIAL: MEGLAS®ALLOY 2605SA1

NOTE :-
THIS DRAWING, THE PROPERTY OF HITACHI
METGLAS INDIA PVT. LTD. IS FURNISHED
SUBJECT TO RETURN ON DEMAND AND THE
CONDITION THAT THE INFORMATION AND
TECHNOLOGY EMBODIED HEREIN SHALL NOT
BE DISCLOSED OR USED AND THE DRAWING
SHALL NOT BE REPRODUCED OR COPIED IN
WHOLE OR IN PART EXCEPT AS PREVIOUSLY
AUTHORIZED IN WRITING. ANY PERSON WHO
MAY RECEIVE OR OBSERVE THIS DESIGN
WILL BE HELD STRICTLY LIABLE FOR ANY
VIOLATION WHETHER WILLEUL OR NEGLIGENT

NO.	REVISION	BY	APPR.	DATE	
			SR	04/19/02	
,	±0.50,+0.7/-0.2,+2.5/-0.0,±2.5 AND DIM. f,Im,Ac,Wa,Ap & g WERE 154.6, 40.86,5.68,64.55,366.33 & 1702.	SA	RK	02/14/04	
3.)	ADDED NOTE#3. (AS PER PCN002).	SA	RK	07/26/04	
4.)	PRODUCT & DRAWING FORMAT REVISED. (AS PER PCN004)	RG	RK	25/09/06	
	1.)	1.) CORE LOSS WAS WRITTEN MEASURED © 0.37T BY MISTAKE,INSTEAD OF 0.037T 2.) b,c,d,e & f TOLERANCE WERE ± 0.50, ± 0.50,+0.70-0.2,+2.50-0.0,±2.5 AND DIM. f,Im,Ac,Wa,Ap & g WERE 154.6, 40.86,5.86,64.53,566.33 & 1702. COMPANY NAME WAS HONEYWELL. 3.) ADDED NOTE#3. (AS PER PCN002). 4.) PRODUCT & DRAWING FORMAT REVISED.	1.) CORE LOSS WAS WRITTEN MEASURED © 0.37T BY MISTAKE,INSTEAD OF 0.037T  2.) b,c,d,e & f TOLERANCE WERE ± 0.50, ±0.50,+0.7/-0.2,+2.5/-0.0,±2.5 AND DIM. f,Im,Ac,Wo,Ap & g WERE 154.6, 40.86,5.68,64.55,366.33 & 1702. COMPANY NAME WAS HONEYWELL.  3.) ADDED NOTE#3. (AS PER PCNOO2). SA  4.) PRODUCT & DRAWING FORMAT REVISED. PC	1.) CORE LOSS WAS WRITTEN MEASURED @ 0.37T BY MISTAKE,INSTEAD OF 0.037T SR D.c.d.e & f TOLERANCE WERE ± 0.50, ±0.50, +0.7/-0.2, +2.5/-0.0, ±2.5 AND DIM. f,Im.Ac.Wa,Ap & g WERE 154.6, 40.86,5.86,84.53,366.33 & 1702. COMPANY NAME WAS HONEYWELL.  3.) ADDED NOTE#3. (AS PER PCN002). SA RK 4.) PRODUCT & DRAWING FORMAT REVISED. PC PK	

ATE	DIMENSIONS	MM	DESCRIPTION  C — C ORE DESIGN					SHEET NO.		DRAWING NO.		REV NO
19/02	SCALE	N.T.S	MATERIA	ΛL.								
14/04	PROJECTION	THIRD ANGLE			AS NOTED			1 OF	- 1	AMCC —	367S	4
	НІТАСНІ		Ι	SR	07/12/01	SR	07/12	2/01	RH	,RM,ST	07/1	9/0
26/04 09/06	METGLAS		.S	DRAWN	DATE	CHECKED	DAT	E	API	PROVED	DA'	TE

#### EG/FM/11/2